


# Figure: Installing Ferrite Cores

This figure illustrates installing a ferrite core to reduce frequency interference (noise) effecting the performance of NonStop S-series systems as described in Support Note S04007: Ferrite Cores for Noise Reduction.

To install a ferrite core, the LAN cable should pass through the core twice by wrapping the cable around the core and then closing the core jacket around the cable:

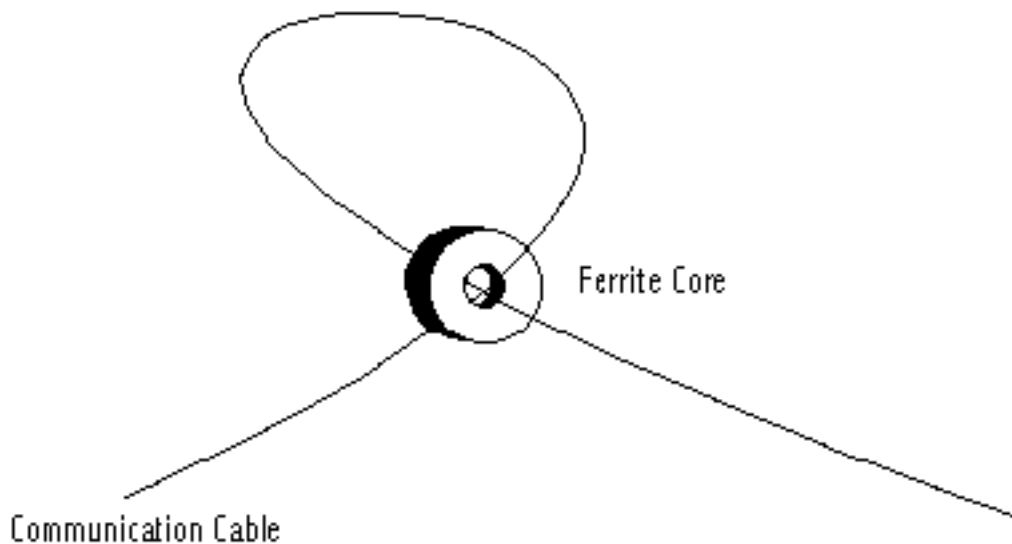

See Support Note S04007 for more information, including where and how many ferrite cores should be installed.